


HEGER.  
THE WORLD OF  
RECYCLING.




# THE TIGER

## T basic

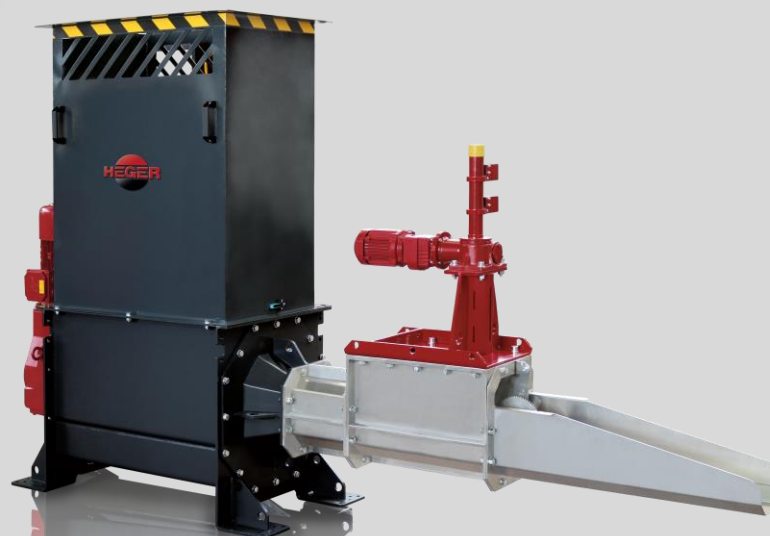

EPS packages or  
EPS production waste



EPS 6, AIRPOP, STYROFOAM

Compactor System, Type	TIGER 130 T basic	TIGER 200 T basic	TIGER 250 T basic	TIGER 300 T basic	TIGER 400 T basic
Capacity <sup>1)</sup>	up to 18 kg/h	up to 50 kg/h	up to 75 Kg/h	up to 110 kg/h	up to 200 kg/h
Achievable compaction <sup>1)</sup>	up to 250 kg/m <sup>3</sup>	up to 250-350 kg/m <sup>3</sup>	up to 250-350 kg/m <sup>3</sup>	up to 250-350 kg/m <sup>3</sup>	up to 250-350 kg/m <sup>3</sup>
Processible material densities	up to 40 g/l	up to 40 g/l	up to 40 g/l	up to 40 g/l	up to 40 g/l
Processible thickness of foamed part	up to 300 mm	up to 350 mm	up to 350 mm	up to 400 mm	up to 400 mm
Actual charging opening (L x W)	800 x 360 mm	1.000 x 500 mm	1.000 x 500 mm	1.000 x 600 mm	1.000 x 600 mm
Block size	130 x 130 mm	210 x 210 mm	260 x 260 mm	320 x 320 mm	400 x 400 mm
Assembly dimensions (L x W x H)	2.824 x 440 x 1.602 mm	2.856 x 600 x 1.700 mm	3.100 x 600 x 1.700 mm	3.357 x 1.240 x 1.950 mm	3.687 x 1.240 x 1.950 mm
Machine weight	350 kg	650 kg	850 kg	1.500 kg	1.800 kg
Electrical connection	1,5 kW	4,0 kW	5,5 kW	7,5 kW	15,0 kW
Supply voltage (EU)	3x 230 V 50 Hz / 3x 400 V 50 Hz	3x 400 V 50 Hz	3x 400 V 50 Hz	3x 400 V 50 Hz	3x 400 V 50 Hz
Supply voltage (USA)	3x 230 V 60 Hz / 3x 480 V 60 Hz	3x 480 V 60 Hz	3x 480 V 60 Hz	3x 480 V 60 Hz	3x 480 V 60 Hz
Marking	CE	CE	CE	CE	CE

<sup>1)</sup> depending on material type and material density

Subject to change without notice / No responsibility is taken for the correctness information